

10936

ELEVATION CERTIFICATE
FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

restrictions: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR).

Instructions for completing this form can be found on the following pages.

SECTION A PROPERTY INFORMATION	FOR INSURANCE COMPANY USE
BUILDING OWNER'S NAME (3358 Barra Circle)	POLICY NUMBER
STREET ADDRESS (Including Apt., Unit, Suite and/or Bldg. Number) OR P.O. ROUTE AND BOX NU	JMBER COMPANY NAIC NUMBER
OTHER DESCRIPTION (Lot and Block Numbers, etc.) LOT 27, BRIGHT WATER SECTION 27, T	COWNSHIP 46-S RANGE 22-E
ANIBEL ISLAND, LEE COUNTY,	STATE ZIP CODE FLORIDA
SECTION B FLOOD INSURANCE RATE MAI	
ovide the following from the proper FIRM (See Instructions):	The second secon
1. COMMUNITY NUMBER 17 2. PANEL NUMBER 3. SUFFIX 4. DATE OF FIRM 120402 0006 C 10-15-8	(in AO Zones, use depth)
For Zones A or V, where no BFE is provided on the FIRM, and the community the community's BFE: feet NGVD (or other FIRM datum-se SECTION C BUILDING ELEVATION	ee Section B, Item 7).
 (b) FIRM Zones V1-V30, VE; and V (with BFE). The bottom of the lowest hor the selected diagram, is at an elevation of	other FIRM datum—see Section B, Item 7). The selected diagram is LNA. I feet above or or diagram is NA. I feet above or or below (check is available, is the building's lowest floor (reference into ordinance? Yes No Unknown the level elevations: NGVD '29 Other (describe turing the elevations is different than that used on the system used on the FIRM and show the conversion tructions on Page 4)
5. The reference level elevation is based on: (NOTE: Use of construction drawings is only valid if the building does not ye case this certificate will only be valid for the building during the course of conwill be required once construction is complete.)	et have the reference level floor in place, in which instruction. A post-construction Elevation Certificate
6. The elevation of the lowest grade immediately adjacent to the building is: Section B, Item 7).	1 1+17 .4 feet NGVD (or other FIRM datum-see
The confirme wheel address the same SECTION D. COMMUNITY INF	FORMATION A COMMON TO THE PROPERTY OF THE PROP
If the community official responsible for verifying building elevations specified is not the "lowest floor" as defined in the community's floodplain management floor" as defined by the ordinance is NA	nt ordinance, the elevation of the building's "lowest FIRM datum-see Section B, Item 7).




SECTION E CERTIFICATION

ertification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1_A30, AE, AH, A (with BFE),V1-V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

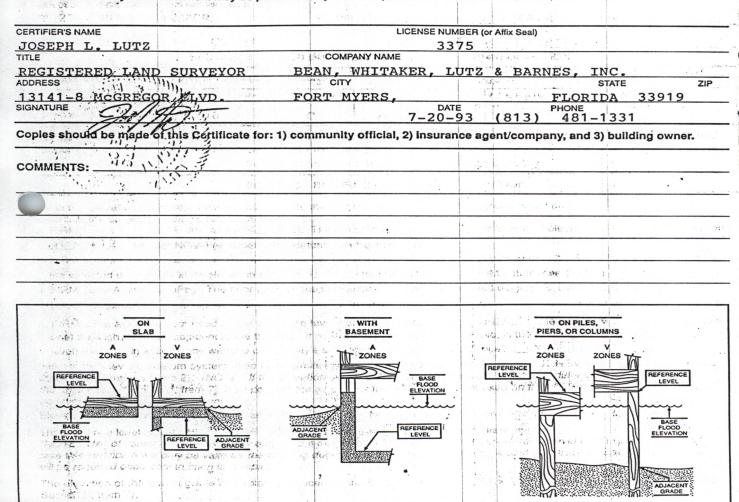

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Sevations for all A Zones should be measured at the top of the reference level floor.

Start Start

tions for all V Zones should be measured at the bottom of the lowest horizontal structural member.